


LED Light Fittings

HRD99 Series Explosion-proof LED Lightings

Mounting type (all dimensions in mm) - subject to alteration

X: Ceiling type




Weight: 2.40kg (20W)(30W)
3.00kg (50W)(70W)
3.80kg (80W)(100W)

Accessories supplied with the light fittings:

- ①. BHD51-F(Ex d IIC, copper-free aluminium alloy)
- ②. BGJ-III Explosion-proof connector
M25×1.5(M)/M25×1.5 (M), Stainless steel.

G: Pendant type




Weight: 2.80kg (20W)(30W)
3.40kg (50W)(70W)
4.20kg (80W)(100W)

Accessories supplied with the light fittings:

- ①. BHD51-F(Ex d IIC, copper-free aluminium alloy).
- ③. Straight pipe(M25×1.5), length: 300mm.
- ④. BGJ-III Explosion-proof connector
M25×1.5(M)/M25×1.5(F), Stainless steel.

K: Bracket type

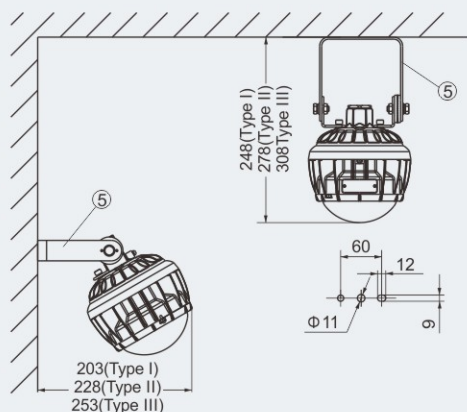


Weight: 1.70kg (20W)(30W)
2.30kg (50W)(70W)
3.00kg (80W)(100W)

Accessories supplied with the light fittings:

- ⑤. Mounting bracket, sheet steel, powder coated.

L: Pole type

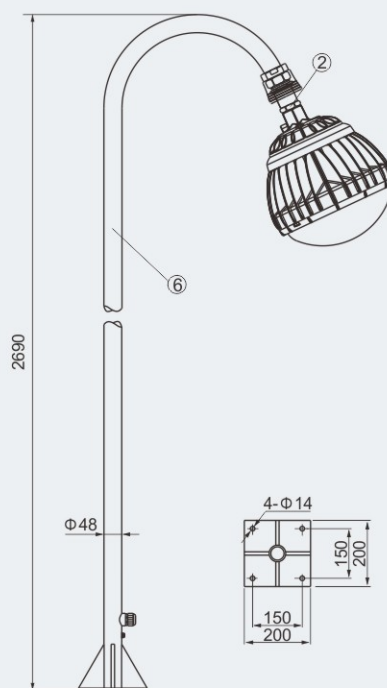

Weight: 1.60kg (20W)(30W)
2.20kg (50W)(70W)
2.90kg (80W)(100W)

Accessories supplied with the light fittings:

- ②. BGJ-III Explosion-proof connector
M25×1.5(M)/M25×1.5 (M), Stainless steel.
- ⑥. Pole (shall be provided by user)