


LED Light Fittings

BAT86 Series Explosion-proof LED Floodlights

Photometric data Note: LED luminous flux is from the standard product of which colour temperature is 5700K (cool white).

BAT86-90-□□


Lamp power (W)	Luminous flux	Wattage
60	6500lm	60W
90	9550lm	91W

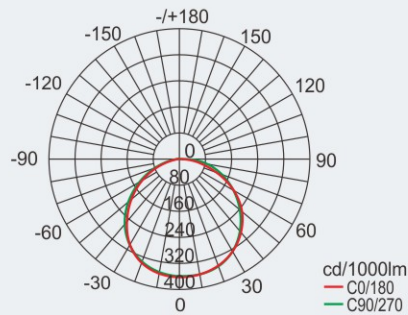

BAT86-90-□□


Lamp power (W)	Luminous flux	Wattage
60	6500lm	60W
90	9550lm	91W

Note: Lens of 40° and 25° can be provided on request.

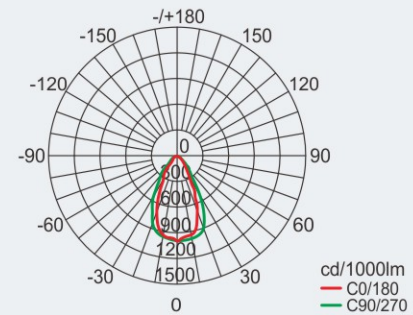

BAT86-160-□□


Lamp power (W)	Luminous flux	Wattage
120	14400lm	120W
160	19800lm	160W

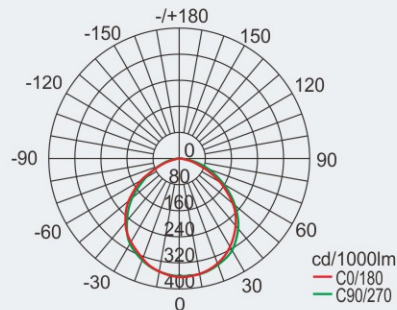

BAT86-160-□□


Lamp power (W)	Luminous flux	Wattage
120	14400lm	120W
160	19800lm	160W

Note: Lens of 40° and 25° can be provided on request.

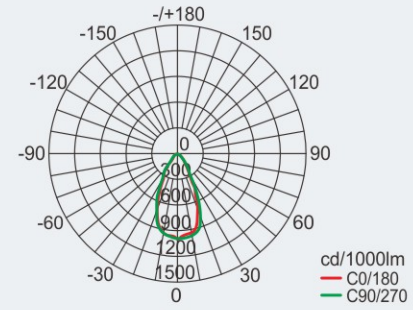

BAT86-240-□□


Lamp power (W)	Luminous flux	Wattage
200	23600lm	205W
240	28400lm	245W

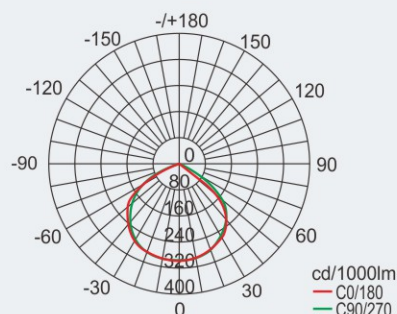

BAT86-240-□□

Note: Measuring parameters of light fitting integrating two lamps

Lamp power (W)	Luminous flux	Wattage
2×200	47200lm	410W
2×240	56800lm	490W

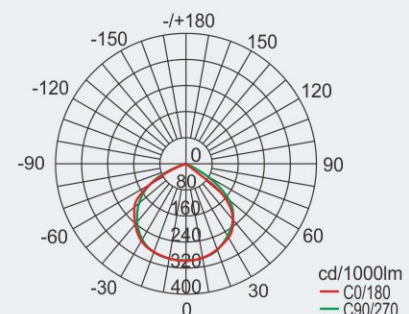

We can provide lighting design and data by professional lighting software DIALUX based upon simulated site situation on request.

