

CCY□7-L LED舱顶灯(C型)

CCY□7-L LED Pendant Light (Type C)



ABS

IP
66/67

应用场所 Application

- 适用于甲板、车间、机舱、仓库、走道及相应区域。
- Deck, workshop, engine room, stores, passage and other relevant areas.

灯体 Housing

- 优质钢板，表面喷白色塑粉
- High-quality steel plate with white plastic powder sprayed on the surface

透明罩 Transparent cover

- PC材质
- PC material

安装方式 Mounting

- 使用4个Φ10mm可安装孔位固定
- Fix by means 4×Φ10mm mounting holes

M: LED 模组(标准配置) LED module (Standard specifications)

- 恒流恒压驱动电源，宽电压输入
- 恒流源：100V~240V AC 50/60Hz
- 应急控制器：230V ± 10% AC 50/60Hz
- Constant current constant voltage drive power, wide voltage input
- Constant-current source: 100V~240V AC 50/60Hz
- Emergency controller: 230V±10% AC 50/60Hz

T: LED灯管(选配) LED tube (Optional)

- LED灯管：T8 LED灯管(双端)
- 应急控制器：220V~240V AC 50/60Hz
- LED Tubes: T8 LED Tubes (Double-Ended)
- Emergency controllers: 220V~240V AC 50/60Hz

可选配件 Options

- ZE: 自带电源应急90分钟
- E: 集中电源应急
- SS: 不锈钢灯体
- T: LED灯管
- ZE: Self-contained power supply, emergency light operation time 90 minutes
- E: Centralized power supply for emergency
- SS: Stainless steel housing
- T: LED Tubes (Double-Ended)

选配表 Selection table

型号 Type	额定电压(V) Rated voltage	光源类型 Light source	额定功率(W) Rated power	光通量(lm) Luminous flux	重量(kg) Weight
CCY27-L	220V~240V AC 50/60Hz 110V/120V AC 60Hz	LED灯管 LED tube	10W × 2	2300	3.6
		LED 模组 LED module	20W	2500	3.6
CCY47-L		LED灯管 LED tube	20W × 2	4600	5.7
		LED 模组 LED module	40W	4800	5.7


- ZE: 自带电源应急90分钟 Self-contained power supply, emergency light operation time 90 minutes
- E: 集中电源应急(DC24V/3W) Centralized power supply for emergency

技术参数 Technical parameters


执行标准 Conformity to standards	IEC 60598, IEC 60092-306, CCS 入级规范 (CCS standard)
环境温度 Ambient temperature	-40°C~+55°C
光源类型 Light source	LED 模组/LED 灯管(选配) LED module/LED tube (Optional)
色温 Color temperature	LED 模组LED module: 6500K ± 250K (3000K、4000K可选 Optional) LED 灯管LED tube: 6500K ± 250K
显色指数 Color rendering index	Ra ≥ 80
防护等级 Degree of protection	IP66、IP67(可选 Optional)
电缆入口 Cable entris	4 × Φ 25.5孔, 配2 × M25 × 1.5格兰(塑料), 2 × Φ 25密封塞, 适用于Φ 9~Φ 16mm电缆 4 × Φ 25.5 hole, with 2 × M25 × 1.5 gland (Plastic), 2 × Φ 25 stopping plug, suitable for Φ 9~Φ 16mm cable
接线端子 Terminal	1.5~4mm ²

外形尺寸 Outline dimension

cd/1000lm




配光曲线
Light distribution curve

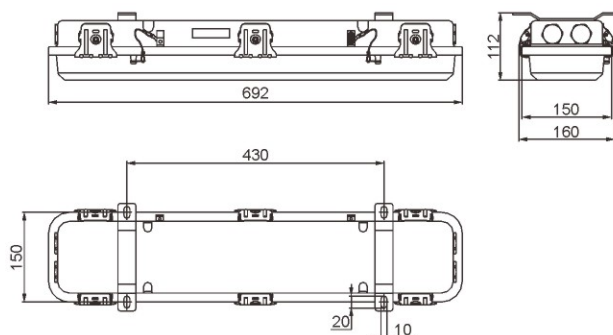


CCY27-L

cd/1000lm



配光曲线
Light distribution curve

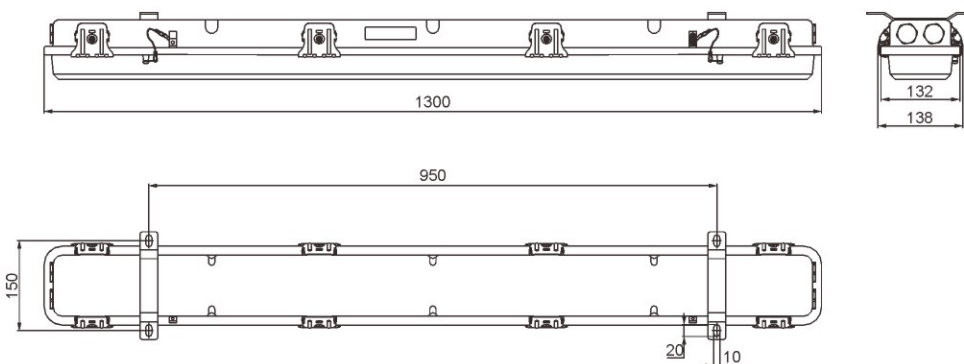

CCY47-L