

应用场所 Application

- 适用于浴室，镜前，床头，桌面及相应区域。
- Suitable for bathroom, mirror light, bedside, desk and other relevant areas.



灯体 Housing

- 优质钢板，表面喷白色塑粉
- High-quality steel plate with white plastic powder sprayed on the surface

透明罩 Transparent cover

- 乳白色PC材质
- Milk white PC material

安装方式 Mounting

- 使用2个Φ5mm的安装孔位来固定
- Fix by means of 2×Φ5mm mounting holes

电气 Electric

- 恒流恒压驱动电源
- Constant current constant voltage driving power

可选配件 Options

- E: 集中电源应急
- E: Centralized power supply for emergency
- SU: 插座
- SU: Universal socket
- SS: 不锈钢灯体
- SS: Stainless steel housing

选配表 Selection table



型号 Type	额定电压(V) Rated voltage	光源类型 Light source	额定功率(W) Rated power	光通量(lm) Luminous flux	重量(kg) Weight
CMY12-1	220V~240V AC 50/60Hz 110V/120V AC 60Hz	LED 模组 LED module	5W × 1	660	0.8
			7W × 1	840	0.8
			7W × 1-SU	840	0.9
			9W × 1	1020	1.0
			9W × 1-SU	1020	1.1

- E: 集中电源应急(DC24V/3W, DC24V/15W) Centralized power supply for emergency

技术参数 Technical parameters

执行标准 Conformity to standards	IEC 60598, IEC 60092-306, CCS 入级规范 (CCS standard)
环境温度 Ambient temperature	-25°C~+55°C
防护等级 Degree of protection	IP44
光源类型 Light source	LED 模组 LED module
色温 Color temperature	4000K ± 250K (3000K、5000K可选 Optional)
显色指数 Color rendering index	Ra ≥ 80
电缆入口 Cable entris	2 × Φ20(密封塞), 适用于Φ6~Φ12mm电缆 2×Φ20 (stopping plug), suitable for Φ6-Φ12mm cable
接线端子 Terminal	1.5~4mm ²

外形尺寸 Outline dimension

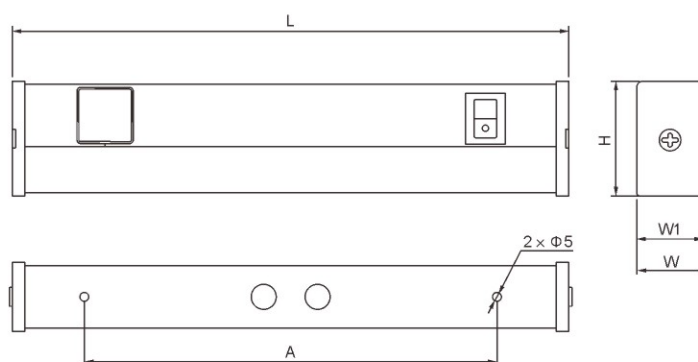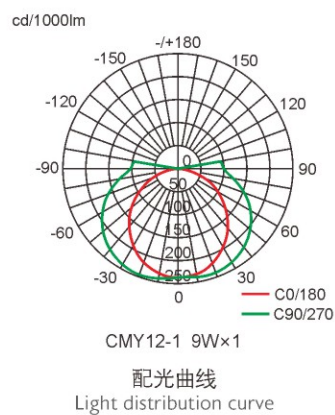

型号 Type	额定功率(W) Rated power	外形及安装尺寸(mm) Outline and installation dimension				
		H	L	W1	W	A
CMY12-1	5W × 1	107	355	62	—	238
	7W × 1	107	355	62	—	238
	7W × 1-SU	107	355	—	67	238
	9W × 1	107	486	62	—	370
	9W × 1-SU	107	486	—	67	370