


LED Light Fittings

HRD91-LED Series Explosion-proof LED Lightings

Mounting type (all dimensions in mm) - subject to alteration

G: pendant pole type




Weight: 3.75kg (type 50)
5.80kg (type 100)

Accessories supplied with the light fittings:

- ①.BGJ-III Explosion-proof connector G3/4"(M)/M25×1.5(F), Stainless steel.
- ②.Straight pipe (M25 x 1.5), length: 300mm.
- ③.BHD51-F(Ex d IIC, copper-free aluminium alloy), see P3/4.

D: hook type




Weight: 2.75kg (type 50)
4.80kg (type 100)

Accessories supplied with the light fittings:

- ①.BGJ-III explosion-proof connector G3/4"(M)/M25 x 1.5(F), Stainless steel.
- ④.Hook (Stainless steel).

X: ceiling type




Weight: 3.30kg (type 50)
5.40kg (type 100)

Accessories supplied with the light fittings:

- ⑤.Mounting feet

B: wall type




Weight: 3.30kg (type 50)
5.40kg (type 100)

Accessories supplied with the light fittings:

- ⑥.Wall bracket

K: bracket type

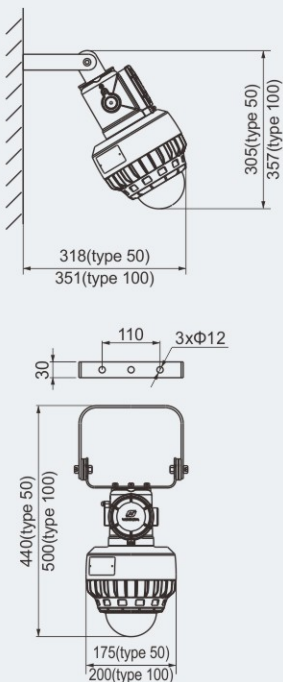


Weight: 4.00kg (type 50)
6.20kg (type 100)

Accessories supplied with the light fittings:

- ⑦. Mounting bracket, sheet steel, powder coated.

L: pole type

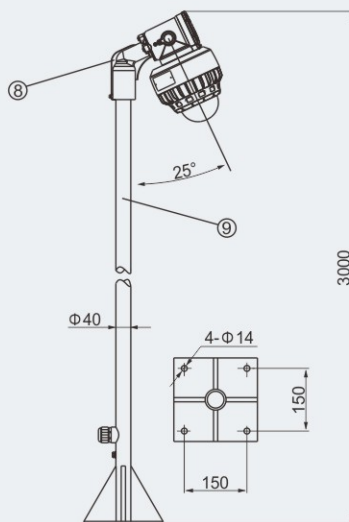


Weight: 2.75kg (type 50)
4.80kg (type 100)

Accessories supplied with the light fittings:

- ⑧. Pole type connector
- ⑨. Pole (shall be provided by user)

H: fence type

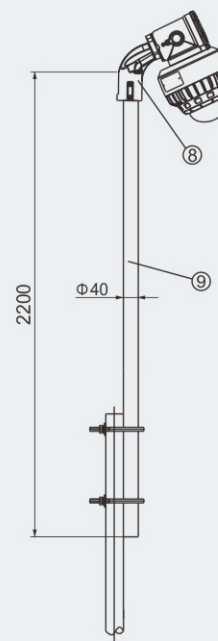

Weight: 2.75kg (type 50)
4.80kg (type 100)

Accessories supplied with the light fittings:

- ⑧. Pole type connector
- ⑨. Pole (shall be provided by user)