



LED Light Fittings


HRD95 Series Explosion-proof LED Lightings

Mounting type (all dimensions in mm) - subject to alteration

K: bracket type

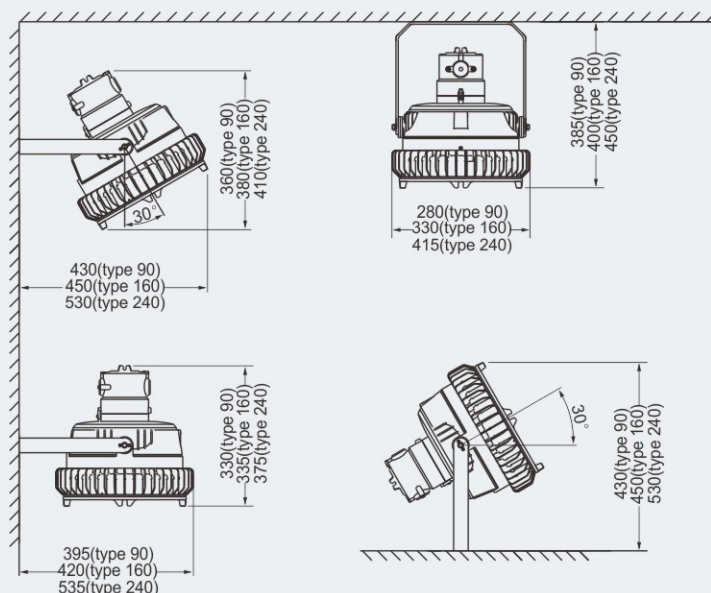


Bracket mounting dimension of type 90, type 160



Bracket mounting dimension of type 240

G: pendant pole type

Note: pendant pole type is unavailable to type 240.

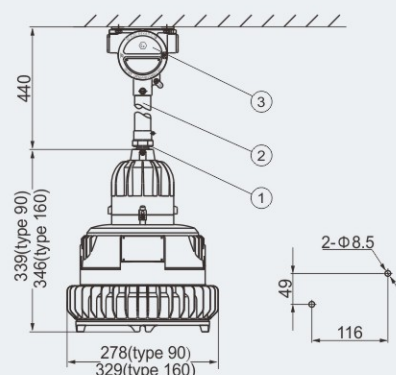


Accessories supplied with the light fittings:

- ①. BGJ-III explosion-proof connector M25×1.5(M)/M25×1.5(F), Stainless steel.
- ②. Straight pipe (M25 x 1.5), length: 300mm.
- ③. BHD51-F (for type 90 and type 160: Copper-free Aluminium Alloy, see P3/4).

D: hook type

Note: hook type is unavailable to type 240.




Accessories supplied with the light fittings:

- ①. BGJ-III explosion-proof connector M25×1.5 (M)/M25×1.5 (F), Stainless steel.
- ④. Hook (Stainless steel).

L: pole type


Note: pole type is unavailable to type 240.

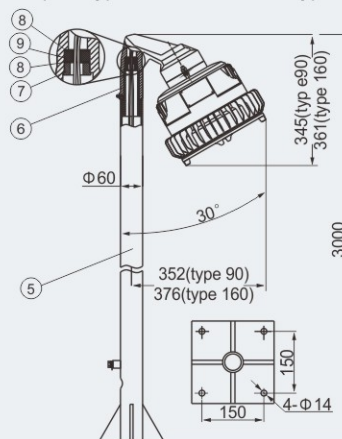

Accessories supplied with the light fittings:

- ⑤. Pole (shall be provided by user).
- ⑥. Outlet sleeve.
- ⑦. Locking bolt.
- ⑧. Washer.
- ⑨. Sealing ring

X: ceiling type

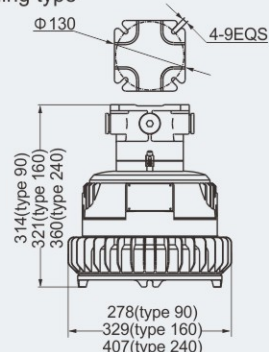

B: wall type

