

应用场所 Application

- 适用于休息室，居所及相应区域。
- Resting room, accommodation and other relevant areas.



B型 Type B

灯体 Housing

- 优质钢板，表面喷白色塑粉
- High-quality steel plate with white plastic powder sprayed on the surface

透明罩 Transparent cover

- 亚克力(PMMA)
- Clear acrylic

安装方式 Mounting

- 使用3个 $\Phi 5$ mm的安装孔位来固定
- Fix by means of 3 $\times \Phi 5$ mm mounting holes

电气 Electric

- 恒流恒压驱动电源，宽电压输入 220V~240V AC 50/60Hz
- Constant current constant voltage driving power, wide voltage input 220V~240V AC 50/60Hz

可选配件 Options

- ZE: 自带电源应急90分钟
- SS: 不锈钢灯体
- ZE: Self-contained power supply, emergency light operation time 90 minutes
- SS: Stainless steel housing

选配表 Selection table


型号 Type	额定电压(V) Rated voltage	光源类型 Light source	额定功率(W) Rated power	光通量(lm) Luminous flux	壳体类型 Enclosure type	重量(kg) Weight
TD1	220V~240V AC 50/60Hz 110V/120V AC 60Hz	LED	9W	1320	B型 Type B	1.3
			12W	1700		

- ZE: 自带电源应急90分钟 Self-contained power supply, emergency light operation time 90 minutes

技术参数 Technical parameters

执行标准 Conformity to standards	IEC 60598, IEC 60092-306, CCS 入级规范 (CCS standard)
环境温度 Ambient temperature	-40°C~+55°C
光源类型 Light source	LED 模组 LED module
色温 Color temperature	4000K ± 250K (3000K、5000K可选 Optional)
显色指数 Color rendering index	Ra ≥ 80
防护等级 Degree of protection	IP44
电缆入口 Cable entris	2 × M20 × 1.5 格兰(黄铜镀镍), 适用于 Φ8~Φ12mm 电缆 2×M20×1.5 gland (Nickel plating of brass), suitable for Φ8~Φ12mm cable
接线端子 Terminal	1.5~4mm ²

外形尺寸 Outline dimension

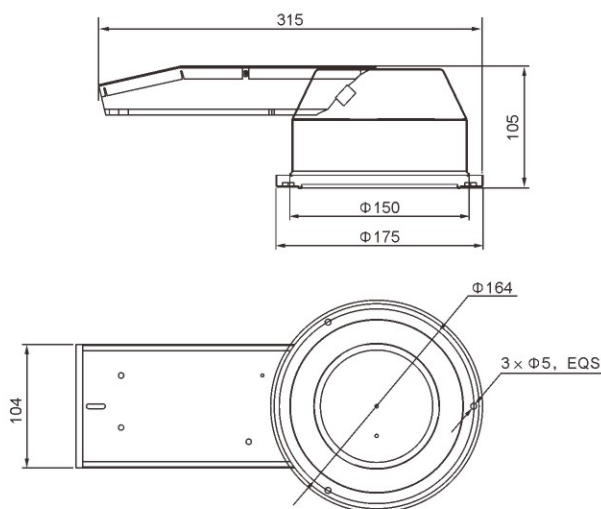

B型 Type B